


SECTION 4

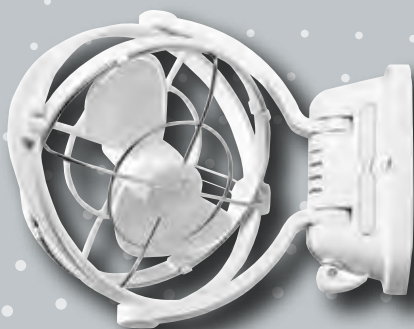

ELECTRICAL EQUIPMENT

(Product Group - 500)

Fans and Smoke Alarms	170
Battery Supplies	171 - 175
Power Inlets and Outlets	187 - 190
Power Points & Switches	188 - 192
Electrical Leads	192 - 193
CMS Equipment	193 - 195
15amp-10amp Adaptors	195 - 196
NARVA Accessory Sockets	196 - 197
Solar Panels	198 - 199
Tyre Inflators (Air Compressors)	200
Trailer Plugs and Sockets	200 - 203
Cable Ties	203
Caframo Fans	204 - 205
Briggs and Stratton Generators	206 - 208
Pressure Cleaners	208 - 209

LIGHTING EQUIPMENT

(Product Group - 500)

Lights and Lenses	175 - 177
Truck and Trailer Lighting	177 - 181
Led Bulbs	182 - 183
Reflectors	183 - 184
Sphere™ Wireless Lighting	185 - 186

GAS EQUIPMENT

(Product Group - 550)

Gas Regulators and Hoses	210 - 213
Gas Unions, Nuts and Valves	213 - 216
Gas Cylinders and Cradles	216
Gas Detector	216

GAS ACRONYMS

BSP	British Standard Pipe
BSPT	British Standard Pipe Tapered
NPT	National Pipe Thread
POL	Prest-O-Lite
SAE	Society of Automotive Engineers
M	This indicates that it is a male fitting
F	This indicates that it is a female fitting

For your own safety all gas fittings and equipment should be installed and checked by a qualified person.

550-00010
TANK GAUGE

Accu-level Magnetic Tank Gauge fits onto RV and barbecue gas tanks.


550-00100
YELLOW GAS SEAL TAPE

Has a heat resistance of +200°C & a cold resistance of up to -20°C. Pressure resistant up to 2600kPa & is made of sintered PTFE (Poly Tetra Fluoro Ethylene).
Dimensions: 12mm (W) x 10m (L)


LOXEAL 58-11 HIGH PRESSURE
THREAD SEALANTS

Ideal for sealing threaded joints against gas, water, oils and other chemicals.

- > Anaerobic adhesive for the sealing of threaded metal to metal joints
- > Seals against gas, water, LPG, hydrocarbons, oils and other chemicals
- > High viscosity - won't run on thread
- > Sealing unaffected by shock/vibration within temperature range: -55°C to +150°C
- > Rapid cure time - functional in less than 3 hours
- > Water-safe & AGA-approved

550-00104
100ML TUBE

550-00106
250ML TUBE


REGULATORS

550-00298
GAS REGULATOR 2 STAGE
(LOW PRESSURE)

Approved for use in portable applications such as outdoor cooking appliances that use a low pressure. Featuring a zinc construction, high and low 1/8" NPT pressure tap ports and a drip lip vent. Meets the RVIA, UL and NFPA test requirements.

Capacity: 190,000BTU/hr (at 30 PSI inlet)
Inlet: 1/4" FNPT | **Outlet:** 3/8" FNP


550-00302
LPG (SINGLE STAGE) GAS REGULATOR
 3.5kg/hr adjustable soft nose BBQ regulator 3/8" BSPF outlet.

550-00304
GAS CYLINDER 2 STAGE ADJ.160MJ
REGULATOR


550-00306
GAS CYLINDER 2 STAGE ADJ.160MJ
REGULATOR KIT-DUAL



550-00310
GAS REGULATOR 160MJ WITH BRACKET
& PIGTAIL ADAPTOR



550-00312
GAS REGULATOR 160MJ MANUAL
CHANGE OVER & BRACKET



550-00314
SINGLE GAS CYLINDER REGULATOR KIT

Single regulator with elbow, metal bracket, 3/8" adaptor with T point & flexible hose with hand wheel. Comes assembled.



550-00316
DUAL GAS CYLINDER REGULATOR KIT

Manual change over regulator, metal bracket, 3/8" adaptor with T point & 2 flexible hoses with hand wheel. Comes assembled.



PIGTAIL

550-00320
COPPER PIGTAIL POL X 1/4"
INVERTED FLARE (750MM LONG)



550-00330
COPPER PIGTAIL POL X 1/4"
INVERTED FLARE (450MM)



GAS HOSES

550-00334
8MM S/S FLEXIBLE HOSE 450MM
 For single bottle kits (avalanche valve x 1/4" BSPT male)



550-00336
8MM S/S FLEXIBLE HOSE 450MM
 For double bottle kits (avalanche valve x inverted flare)



550-00337
8MM S/S FLEXIBLE HOSE 600MM
 For double bottle kits (avalanche valve x inverted flare)



550-00338**8MM S/S FLEXIBLE HOSE 900MM**

For double bottle kits (avalanche valve x inverted flare)

**550-00340****S/S FLEXIBLE HOSE 450MM**

with hand wheel for single bottle kit. (POL x 1/4" NPTM)

**550-00341****S/S FLEXIBLE HOSE 600MM**

with hand wheel for single bottle kit. (POL x 1/4" NPTM)

**550-00344****S/S FLEXIBLE HOSE 450MM**with hand wheel for double bottle kit
(POL x 7/16-24TPI" FIXED)**550-00345****S/S FLEXIBLE HOSE 600MM**with hand wheel for double bottle kit
(POL x 7/16-24TPI" FIXED)

Class: F, 6mm, 2600Kpa

**550-00349****S/S FLEXIBLE HOSE 3000MM**

With Male Bayonet + Handle 3/8 Sae F

**550-00350****VALVE & ADAPTER**

Manual changeover valve t/s regulator

**550-00360****MOUNTING BRACKET**

A universal regulator bracket (i.e. suits single, twin stage regulators)

**550-00370****SCREWS FOR MOUNTING BRACKET****550-00380****INVERTED FLARE STRAIGHT MALE UNION ADAPTER**

2 stage gas regulator. (1/4" MNPT x 1/4" female inverted flare)



550-00390
INVERTED FLARE 90° ELBOW MALE UNION ADAPTOR

2 stage gas regulator. (1/4" MNPT x 1/4" female inverted flare)



550-00550
GAS HOSE 3/8" BSPM X 1/4" BSPF X 600MM



550-00412
LPG AUTOMATIC SHUT-OFF VALVE & LEAK DETECTOR

Gas safety shut-off valve automatically shuts off the flow of gas in case of a leak. Quick and easy to install the glow in the dark dial indicates when the gas level is low. Comes with a five year warranty.



550-00560
GAS HOSE 3/8" BSPM X 1/4" BSPF X 900MM



550-00570
GAS HOSE 3/8" BSPM X 1/4" BSPF X 1200MM



550-00500
GAS HOSE 3/8" BSPM X 3/8" SAEM X 300MM



550-00600
SAE MALE X BSP FEMALE UNION 5/16" X 1/4"



550-00510
GAS HOSE - 6MM PVC, 5/16" SAE MF X 3/8" BSP M, 300MM

For use with LPG (propane)

Inlet: 5/16" SAE MF

Outlet: 3/8" BSP M

AGA Approval: 4237

Gas Hose Class (Max Working Pressure/Working Temp):

C (2600kPa/-200C to +650C)

Hose Diameter: 6mm



550-00602
SAE MALE X BSP FEMALE UNION 5/16" X 3/8"



550-00604
SAE MALE X BSP FEMALE UNION 3/8" X 1/4"



4

GAS EQUIPMENT

550-00606
SAE MALE X BSP FEMALE UNION
3/8" X 3/8"



550-00608
SAE MALE X BSP FEMALE UNION
3/8" X 1/2"



550-00610
SAE MALE X SAE MALE DOUBLE UNION
5/16" X 5/16"



550-00612
SAE MALE X SAE MALE DOUBLE UNION
3/8" X 3/8"



550-00614
REDUCING UNION 3/8" X 5/16"



550-00616
SAE MALE X SAE MALE DOUBLE ELBOW
5/16" X 5/16"



550-00618
SAE ALL MALE 3-WAY TEE CONNECTOR
5/16"



550-00620
SAE ALL MALE 3-WAY TEE CONNECTOR
3/8"



550-00622
BSP MALE TAPERED X BSP FEMALE
ELBOW 1/4" X 1/4"



550-00624
SAE FLARE NUT 5/16"



550-00626
SAE FLARE NUT 3/8"



550-00628
SAE REDUCING FLARE NUT 3/8" X 5/16"



550-00630
SAE 45° FLARE BRASS FITTING, MALE
UNION, 5/16 TUBE, 1/8 BSPT



550-00632
SAE MALE X BSP TAPERED MALE UNION
5/16" X 1/4"



550-00634
SAE 450 FLARE BRASS FITTING, MALE
UNION, 5/16 TUBE, 3/8 BSPT



550-00636
SAE MALE X BSP TAPERED MALE UNION
3/8" X 1/8"



550-00638
SAE MALE X BSP TAPERED MALE UNION
3/8" X 1/4"



550-00640
SAE MALE X BSP TAPERED MALE UNION
3/8" X 3/8"



550-00642
SAE MALE X BSP MALE TAPERED ELBOW
5/16" X 1/4"



550-00644
SAE MALE X BSP MALE TAPERED ELBOW
5/16" X 3/8"



550-00646
BALL VALVE BSP FEMALE X BSP
FEMALE 1/4" X 1/4"



550-00648
FLARED BALL VALVE 5/16" X 5/16" SAE



550-00650
FLARED BALL VALVE 3/8" X 3/8" BSP



550-00652
FLARED BALL VALVE 1/2" X 1/2" BSP



550-00700
GAS TESTING NIPPLE
3/8" flare x 3/8" male



550-00710**GAS FLOOR SOCKET FEMALE CHROME**

Manufactured from high quality brass and stainless steel. The unit is corrosion resistant and is approved to the AGA requirements. Chrome plated, with the inlet being a 1/2" BSP threaded connection. (7Kpa)

**550-00711****DUST CAP T/S CHROME PLATED BAYONETS**

Dust cover to suit bayonet outlet.

**550-00712****MALE BAYONET SOCKET 1/4" BSP**

Comes with a 1/4" BSP male nipple for screw on attachment to a standard gas hose with compatible female union fittings.

**GAS CYLINDERS****550-01000****MANCHESTER 9KG GRADE 2 GAS CYLINDER POL**

L/H Thread, No Gauge

**550-01010****MANCHESTER 4KG GRADE 2 GAS CYLINDER POL**

L/H Thread, No Gauge

**550-01302****STRAP RATCHET T/S GAS BOTTLE**

Ratchet strap to suit gas bottles.

**CRADLES****550-01050****CRADLE T/S 9KG (GALVANISED)**

With a quick release mechanism.

**550-01060****CRADLE T/S 4KG (GALVANISED)**

With a quick release mechanism.

**550-02010****12V GAS DETECTOR**

Can be installed in homes, motor homes, caravans and the like. It detects a gas leakage and triggers the alarm when the gas level reaches 10% of the LEL (Lowest Explosion Limit) in the air. 120H x 80W x 40D (mm)

**550-01300****GAS BOTTLE SLIDE (WITH THUMB LOCKS)**

Made from mild steel, this slide holds x2 9kg gas bottles.

Weight: 5.2kg

Dimensions: 656 x 280 x 285 (mm)

